

Model	A	B	C	D
ASPIRODOR 200	205	220	130	160
ASPIRODOR 300	227	245	130	160

ASPIRODOR

CENTRIFUGAL FAN WITH DOUBLE INLET

- Centrifugal double inlet fans to extract air directly outside or through ducting;
- Suitable for wall/ceiling mounting;
- Backdraught shutter to prevent ingress of air and foul odours;
- For ducts between Ø 100 mm and 150 mm;

- Simple to remove the washable filter (except Aspirodor 200, not included);
- Double insulated product, without ground wire for fast connection;
- Adjustable speed through RGE optional controller;
- In accordance with Standard EN 60335-2-80.



POSITIONING

- Wall mounting - Duct mounting

TECHNICAL DATA



Model	Code	Ø hole (mm)	Voltage (V)	Frequency (Hz)	Flow rate (m³/h)	Max press. (mm H ₂ O)	Max press. (Pa)	Power (W)	Noisiness dB(A) _{1m}	Weight (Kg)
ASPIRODOR 200	0014500	100-150	220-240	50	200	21	206	80	49	1,8
ASPIRODOR 300	0014900	100-150	220-240	50	350	27	265	80	53	2,2

FURTHER INFORMATION...

- Made of ABS material;
- Quick and easy connection via accessible side electric box;
- Horizontal or vertical mounting;
- Backdraught shutter to prevent ingress of air and foul odours

- The double inlet combines silent operation with high performance
- Fast maintenance and replacement of the washable filters (Aspirodor 300) by simple disassembly and assembly of the filter holders. Washable filters ensure long life of the motor and the impeller.

FLOW CHARTS

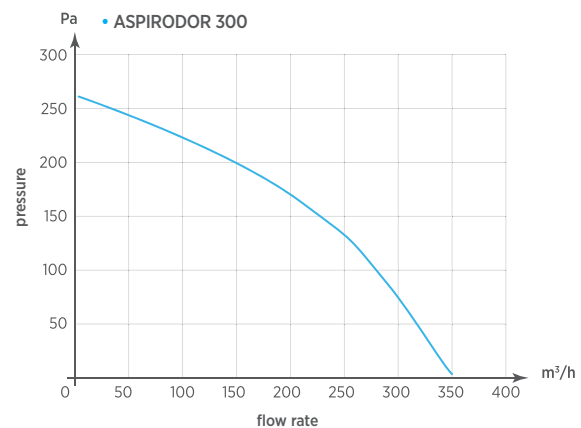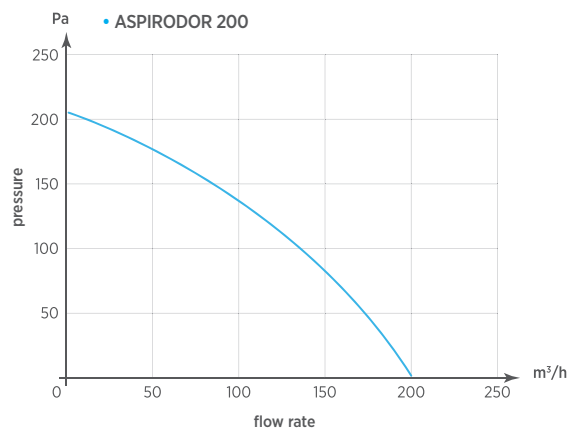

ACCESSORIES:

SEE PAGE 56



Grille



Shutter



Controller