


MULTI

AXIAL FAN

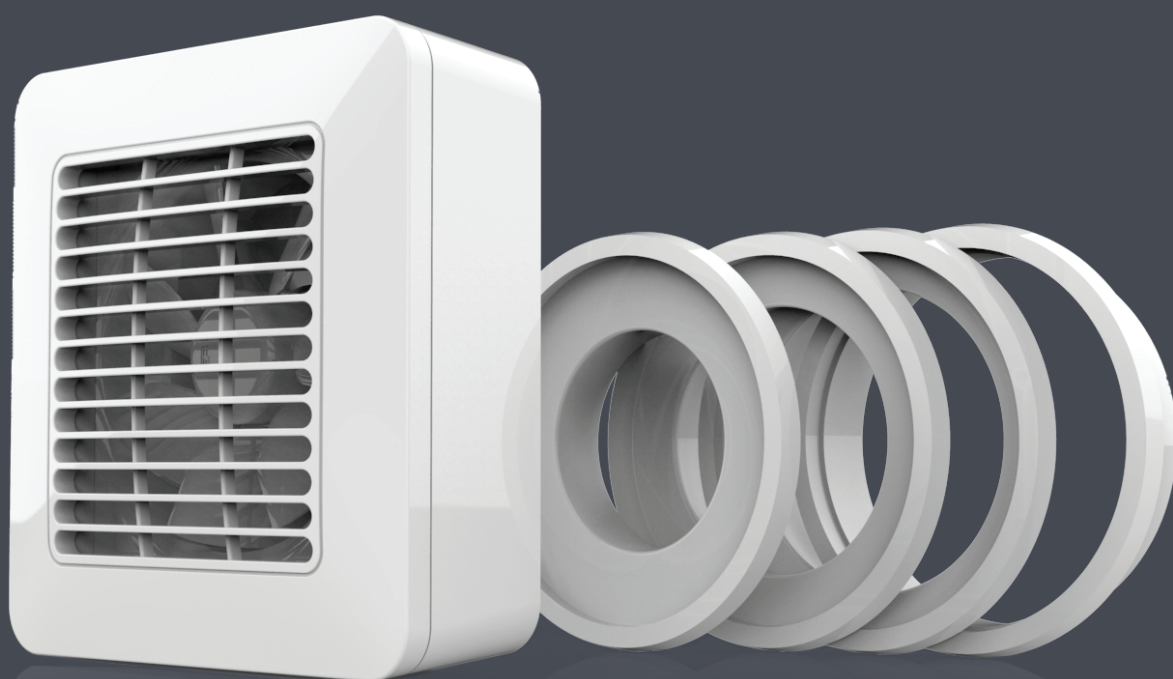

UNIVERSAL

4,9
W

SILENT

 S.O.ERRE

AXIAL FAN FOR THE EXTRACTION OF THE AIR DIRECTLY OUTSIDE OR THROUGH SHORT DUCTING

MULTI is an axial fan capable of moving big volumes of low pressure air. Complete with four adapters, available with the diameters of 80, 90, 100 and 120mm, allows the maximal flexibility of installation with one unique product. Multi is equipped with a new brushless motor of high efficiency and easy maintenance, with reduced consumption with 4,9W. About 70% less than market average. Compact and essential design finds an easy insertion in every kind of environment, civil or commercial. Suitable for the ventilation of small and medium rooms like bathrooms, kitchens, laundries and offices. Only one product, able to unite flexibility, high performance and elevated silence.



ONE UNIQUE PRODUCT FOR SEVERAL DIAMETERS

Four adapters, with diameters 80/90/100/120mm included



HIGH EFFICIENCY NEW BRUSHLESS MOTOR

- Reduced consumption
- Minimal maintenance
- Silence and comfort granted



ENERGY SAVING


Thanks to the new motor, the consumption is reduced up to 70%



MAXIMAL SILENCE AND COMFORT

Only 33 dB(A)_{3m}

DIMENSIONS

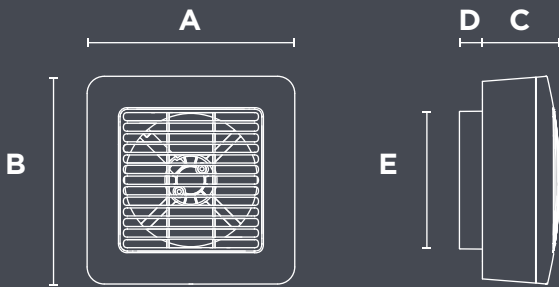

MODEL	A	B	C	D	E
MULTI	180	180	60	20	Ø80-90-100-120



TECHNICAL DATA

Model	Code	Ø Hole (mm)	Voltage (Volt)	Frequency (Hz)	Flow rate (m³/h)	Press. Max (mmH₂O)	Press. Max (Pa)	Power (W)	Noise dB(A) _{3m}	Weight (Kg)
MULTI	0057800	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	0,6
MULTI T	0057801	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	0,6
MULTI HT	0057802	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	0,6



Axial fan to extract air directly outside or through short ducting


- Operation indicator light
- Click assembly grid
- Two fixing screws and click assembly of the grille for an easy installation
- Suitable for ducts Ø80-90-100-120 thank to the four interchangeable back conveyor
- Made of ABS anti-UV
- Ball bearing DC motor, for a long life and a low power consumption
- Versions: Base, Timer, HT
- IPX4 protected
- 45°C working temperature
- Glass kit (optional)

• **POSITIONING:** Wall mounting, ceiling mounting and glass mounting with an optional kit

CE IPX4 T 45

PERFORMING DATA

Modello	MULTI Ø 80			MULTI Ø 90			MULTI Ø 100			MULTI Ø 120		
	Flow rate (m³/h)	Power (W)	Noise dB(A) _{3m}	Flow rate (m³/h)	Power (W)	Noise dB(A) _{3m}	Flow rate (m³/h)	Power (W)	Noise dB(A) _{3m}	Flow rate (m³/h)	Power (W)	Noise dB(A) _{3m}
MULTI	50	4,9	33	95	6,4	33	125	6,4	33	175	6,9	33

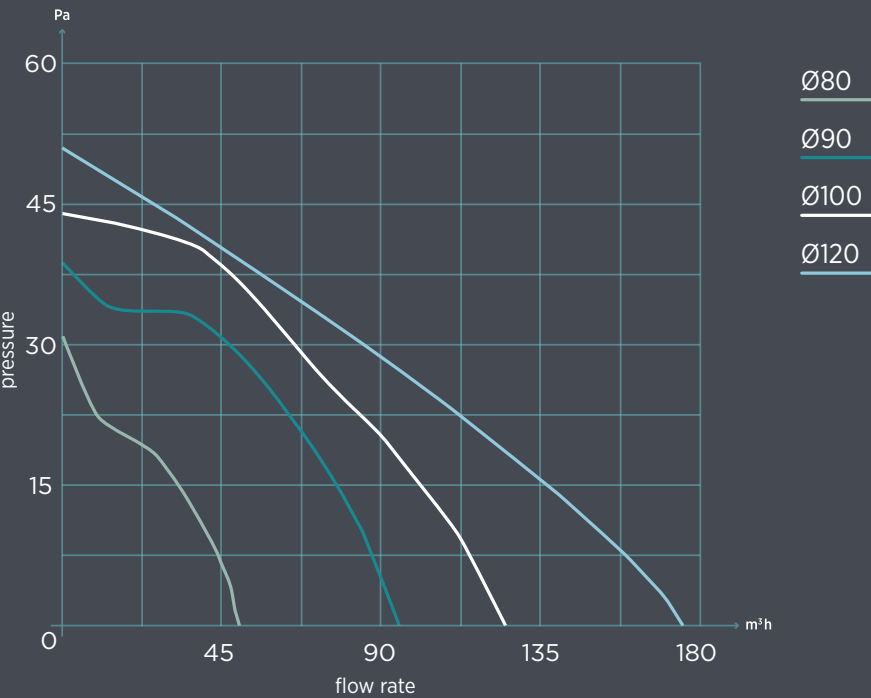



O.ERRE

EP S.p.A

via Del Commercio 1, 25039 Travagliato -BS- Italy
ph. +39 030 68 62 341 - fax. +39 030 25 84 012

email: vendite@oerre.it - web: www.oerre.it