


ASPIRATORE ASSIALE – AXIAL FAN

GREENLINE
NEW!

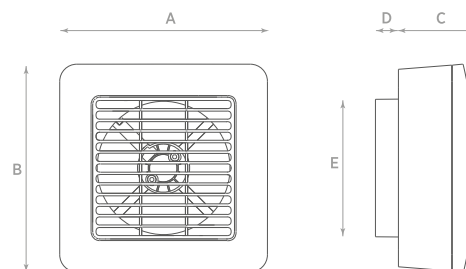

MODELLO	A	B	C	D	ØE
MODEL					
MULTI	180	180	60	20	Ø80-90-100-120

CE IPX4 T45



Aspiratori elicoidali per espulsione aria direttamente all'esterno o in brevi condotti. Adatto anche per l'installazione a vetro tramite Kit vetro opzionale.

- Spia di funzionamento;
- Griglia di montaggio a scatto;
- Rapido fissaggio con l'utilizzo di due sole viti;
- Grazie ai quattro imbocchi posteriori intercambiabili è compatibile con condotti diametro 80-90-100-120;
- Realizzato in ABS anti-UV;
- Motore DC su cuscinetti a sfera con consumi ridotti a lunga durata;
- Versioni Base, Timer, HT;
- Grado di protezione IPX4;
- Temperatura ambiente di esercizio 45°C;
- KIT vetro opzionale.
- **POSIZIONAMENTO:** A parete, a soffitto, a vetro con kit opzionale

Axial fans to extract air directly outside or through short ducting also suitable for glass application with optional glass kit.

- Operation indicator light;
- "Snap" assembly grid;
- Two fixing screws and click assembly of the grille for easy installation;
- Suitable for ducts Ø80-90-100-120 thanks to the four interchangeable back conveyor;
- Made of ABS anti-UV;
- Ball bearing DC motor, for a long life and a low power consumption;
- Versions: Base, Timer, HT;
- IPX4 protected;
- 45°C working temperature ;
- Glass kit (optional).
- **POSITIONING:** wall and ceiling mounting. Glass installation with optional kit





DATI TECNICI – TECHNICAL DATA

MODELLO	CODICE	Ø FORO	TENSIONE	FREQUENZA	PORTATA MAX	PRESS. MAX	PRESS. MAX	POTENZA	RUMOROSITÀ	PESO
MODEL	CODE	Ø HOLE	VOLTAGE	FREQUENCY	MAX FLOW RATE	MAX PRESS.	MAX PRESS.	POWER	NOISE	WEIGHT
		(mm)	(Volt)	(Hz)	(m³/h)	(mm H₂O)	(Pa)	(W)	dB(A) _{1m}	(Kg)
MULTI	0057800	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	0,6
MULTI T	0057801	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	0,6
MULTI HT	0057802	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	0,6

DATI TECNICI CON I DIVERSI IMBocchi – TECHNICAL DATA WITH DIFFERENT DUCTS

MODELLO	PORTATA	POTENZA	RUMOROSITÀ
MODEL	FLOW RATE	POWER	NOISE
	(m³/h)	(W)	dB(A) _{1m}
Ø 80	50	4,9	33
Ø 90	95	6,4	33
Ø 100	125	6,4	33
Ø 120	175	6,9	33

GRAFICI DI PORTATA – FLOW CHARTS

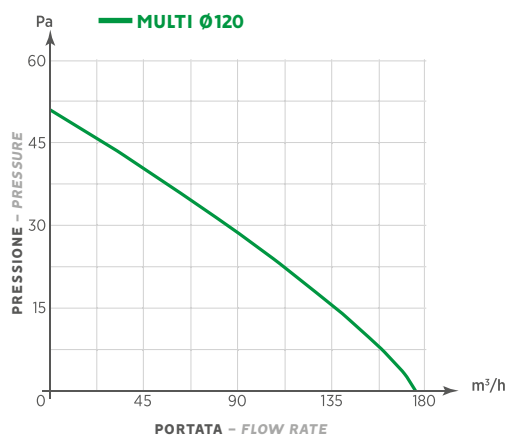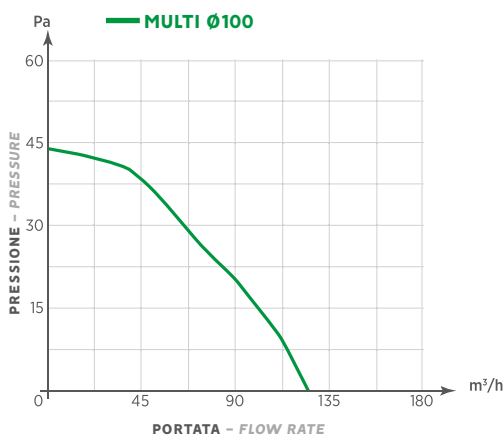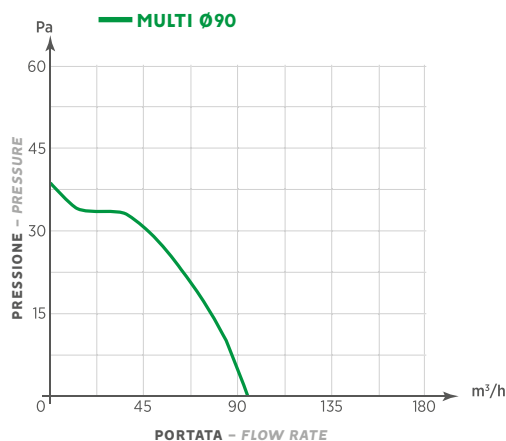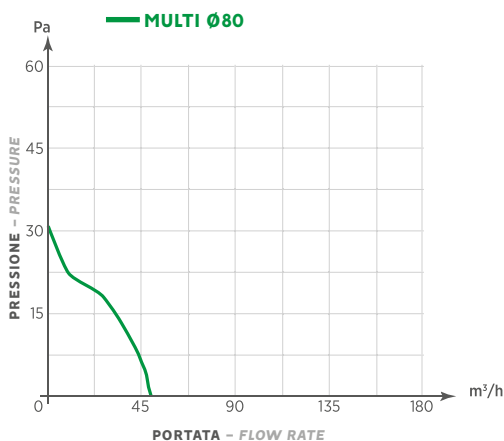

APPROFONDIMENTI – FURTHER INFORMATION

MULTI

- **UN SOLO PRODOTTO PER PIU' DIAMETRI**
Ø 80 – 90 – 100 – 120

• NUOVO MOTORE BRUSHLESS

Alta efficienza
Consumi ridotti
Minima manutenzione

• RISPARMIO ENERGETICO

Motor Brushless, consumi ridotti fino al 70%

• MASSIMA SILENZIOSITA' E COMFORT

Solo 33 dB(A)_{3m}



MULTI

- **ONE PRODUCT FOR SEVERAL DIAMETERS**
Ø 80 – 90 – 100 – 120

• NEW BRUSHLESS MOTOR

High efficiency
Reduced consumption
Minimal maintenance

• ENERGY SAVING

Brushless motor, reduced consumption up to 70%

• LOW NOISE MAXIMUM AND COMFORT

Only 33 dB(A)_{3m}

UN SOLO PRODOTTO PER PIÙ DIAMETRI – ONE PRODUCT FOR MORE DIAMETERS

