



VENTILAZIONE - VENTILATION

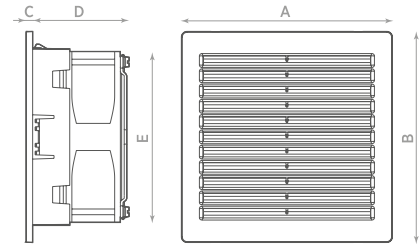

MODELLO MODEL	□ A	□ B	C	D	E
RCQ 50.11	110	110	4,5	61	80



SCHEMA DI FORATURA DRILLING SCHEME	□ A	□ B	Ø C
RCQ 50.11	92x92	95x95	2,6


- Ventilatori completi di griglia e di filtro;
- Griglia a profilo piatto;
- Grado di protezione IP54 (IP44 a richiesta);
- Temperatura operativa di funzionamento: -10°C + 70°C;
- Montaggio rapido: ganci elastici a scatto forniti con guarnizione di tenuta pre-montata;
- Predisposizione per il fissaggio con viti (non fornite);
- Corpo in ABS autoestinguente colore grigio RAL 7035;
- Motore su cuscinetti a sfera per una lunga durata;
- Griglia colore grigio RAL 7035 (a richiesta grigio RAL 7032 e nero RAL 9005);
- Griglia facilmente rimovibile per sostituzione del filtro;
- Feritoie griglia predisposte per drenaggio condensa;
- Conforme alle dirett. comunitarie in vigore e alla Norma EN 60529-2-80, EN 60335-2-80;

- Axial fans supplied with grille and filter;
- Low external profile;
- IP54 protection degree (IP44 on request);
- Maximum operating temperature: -10°C +70°C;
- Quick and functional assembly of the fan on the electrical cabinet through elastic click hooks and gasket pre-installed on the product;
- Possible installation with screws (not provided);
- Body and Grille made of ABS self-extinguishing material grey RAL 7035;
- Ball bearing motor;
- Grilles in grey RAL 7035 and 7032, black RAL 9005;
- Easily removable grille to allow quick replacement of the filter;
- Slotted external grilles to allow drainage of condensation;
- In accordance with European Standard EN 60529, EN 60335-2-80;

DATI TECNICI - TECHNICAL DATA

MODELLO MODEL	CODICE CODE	MODELLO MODEL	CODICE CODE	GRADO IP IP GRADE	TENSIONE VOLTAGE (V)	FREQUENZA FREQUENCY (Hz)	COLORE COLOUR griglia/ grille	PORTATA FLOW RATE (m ³ /h)		POTENZA POWER (W)	CORR. NOM. NOM. CURR. (A)	RUMOROSITÀ NOISE dB(A) _{1m}	PESO WEIGHT Kg
immissione intake		estrazione extraction						con filtro with filter	senza filtro without filter				
RCQ 50.11	0104535	RCQ 50.11 E	0104935	IP54	12	-	GRIGIO/GREY RAL 7035	25	35	3	0,15	30	0,2
RCQ 50.11	0104635	RCQ 50.11 E	0105035	IP54	24	-	GRIGIO/GREY RAL 7035	25	35	3	0,08	30	0,2
RCQ 50.11	0104735	RCQ 50.11 E	0105135	IP54	110-120	50/60	GRIGIO/GREY RAL 7035	25	35	9	0,12	32	0,4
RCQ 50.11	0104835	RCQ 50.11 E	0105235	IP54	220-240	50/60	GRIGIO/GREY RAL 7035	25	35	9	0,06	32	0,4

GRAFICI DI PORTATA - FLOW CHARTS

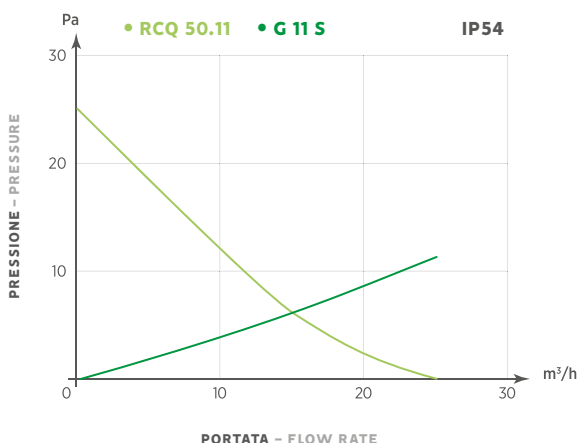

ACCESSORI (PAGINA 24, 46, 48) ACCESSORIES (PAGE 24, 46, 48)



Griglie
Grilles



Termostati
Thermostats



Igrostato
Hygrostat