

Model	A	B	C	D	Ø E
SILENTE	184	184	101,5	8,5	98

## SILENTE

### CENTRIFUGAL FAN

- Centrifugal fans to extract air directly outside or through ducting;
- Suitable for wall/ceiling mounting;
- Backdraught shutter to prevent ingress of air and foul odours;
- For ducts between Ø100mm and 150mm;
- Base, Timer, HT, Sensor, 12V model options;
- Simple to remove the washable filter;
- Central air outlet;

### POSITIONING

- Wall mounting - Duct mounting - Ceiling mounting

### TECHNICAL DATA

Model	Code	Ø hole (mm)	Voltage (V)	Frequency (Hz)	Flow rate (m <sup>3</sup> /h)	Max press. (mm H <sub>2</sub> O)	Max press. (Pa)	Power (W)	Noisiness dB(A) <sub>1m</sub>	Weight (Kg)
SILENTE	0086500	100-150	220-240	50	75	12	118	19	36	0,9
SILENTE 12 V	0087000	100-150	220-240	50	60	10	98	15	36	0,9
SILENTE T	0086700	100-150	220-240	50	75	12	118	19	36	0,9
SILENTE T 12 V	0087100	100-150	220-240	50	60	10	98	15	36	0,9
SILENTE Sensor	0086600	100-150	220-240	50	75	12	118	19	36	0,9
SILENTE HT	0086800	100-150	220-240	50	75	12	118	19	36	0,9

### FURTHER INFORMATION

- Timer version: Turn-off delay adjustable from 2 to 25 minutes;
- Silente HT version: The fan automatically starts when the humidity in the room is higher than the preset value, adjustable from 40% to 90%;
- Sensor version: The fan automatically starts when the sensor detects a presence in the room. When the room is vacated the fan will continue to run

- Double insulated product, without ground wire for fast connection;
- Made of ABS material;
- Adjustable speed through RGE or RG 5 optional controllers (base version only);
- IPX4 protected (EN 60529);
- In accordance with Standard EN 60335-2-80.

### FOR ALL MODELS...

Supplied with washable filter assuring long life of the motor and high protection to the impeller;



- Elastomer gasket suitable for uneven surfaces for trouble free installation;

- Quick installation as all components are clicked together;
- The reduced size of the exit spigot allows to install the unit into ducting with curves placed immediately behind the exit hole.





**FLOW CHARTS**

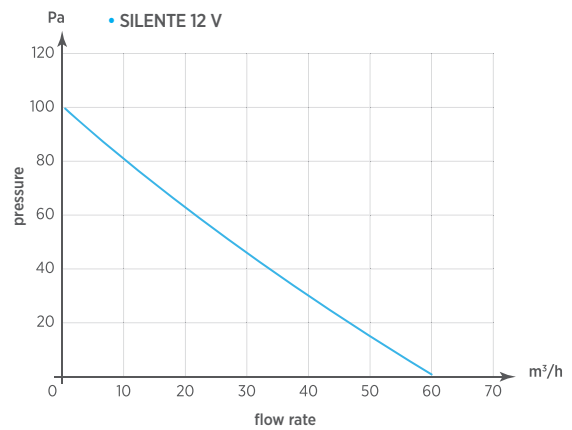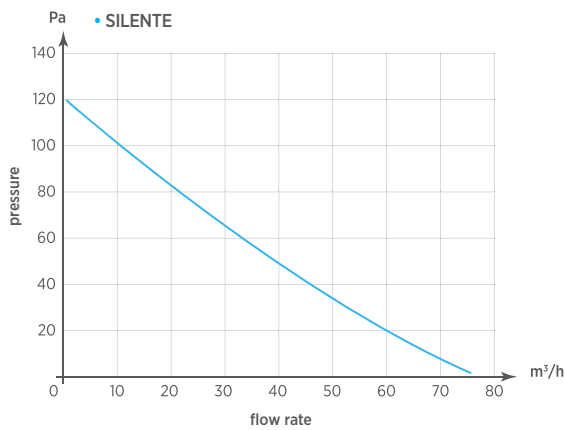

**ACCESSORIES:**  
SEE PAGE 56



Grille



Shutter



Filter



Controller



Sensor



Timertronic



Timermatic