

Model	A	B	C	D	Ø E
STANDARD 8	123	123	58	24	75

STANDARD 8



AXIAL FAN

- Axial fans to extract air directly outside or through short ducting;
- Double insulated product, without ground wire for fast connection;
- For ducts Ø 80-100 mm;
- Base, Timer, Pull cord model options;
- Timer version supplied with Timermatic integrated;
- IPX4 protected (EN 60529);
- In accordance with Standard EN 60335-2-80.


POSITIONING

- Wall mounting - Ceiling mounting

TECHNICAL DATA

Model	Code	Ø hole (mm)	Voltage (V)	Frequency (Hz)	Flow rate (m³/h)	Max press. (mm H ₂ O)	Max press. (Pa)	Power (W)	Noisiness dB(A) _{1m}	Weight (Kg)
STANDARD 8	0084700	80 - 100	220-240	50	35	1	9,8	15	36	0,4
STANDARD 8 T	0084800	80 - 100	220-240	50	35	1	9,8	15	36	0,4

FLOW CHARTS

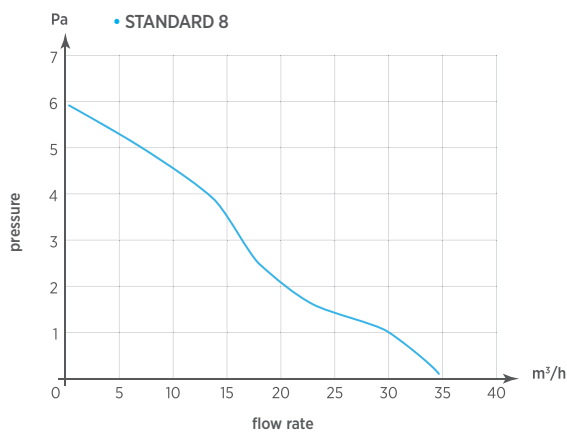

ACCESSORIES:

SEE PAGE 56



Controller



Sensor



Timertronic



Timermatic