

Model	A	B	C	D
VENTIL 10 - VENTIMATIC 10	154	154	77	29
VENTIL 12 - VENTIMATIC 12	174	174	74	29
VENTIL 15 - VENTIMATIC 15	210	210	99	29

VENTIL E VENTIMATIC

AXIAL FAN GLASS MOUNTING

- Axial fans to extract air directly outside;
- Glass or panel mounting up to 10 mm;
- Slow and quiet motion of shutter (Ventimatic);
- Manual opening through Pull Cord (Ventil);
- Rain proof external grille;
- Double insulated product, without ground wire for fast connection;

- Optional kit for double glass installation;
- Careful selection of materials: grilles in white ABS and body in polystyrene;
- Ventil and Ventimatic series supplied with anti-vibration gasket;
- IPX4 protected (EN 60529);
- In accordance with Standard EN 60335-2-80.





POSITIONING

- Glass mounting

TECHNICAL DATA

Model	Code	Ø hole (mm)	Voltage (V)	Frequency (Hz)	Flow rate (m³/h)	Max press. (mm H ₂ O)	Max press. (Pa)	Power (W)	Noisiness dB(A) _{3m}	Weight (Kg)
VENTIL 10	0084000	135-145	220-240	50	70	2,2	22	13	33	0,9
VENTIL 12	0084100	155-165	220-240	50	100	3,0	29	13	34	1
VENTIL 15	0084200	186-195	220-240	50	155	4,0	39	29	42	1,6
VENTIMATIC 10	0011000	135-145	220-240	50	70	2,2	22	16	33	0,9
VENTIMATIC 12	0011100	155-165	220-240	50	100	3,0	29	16	34	1
VENTIMATIC 15	0011200	186-195	220-240	50	155	4,0	39	29	42	1,6

FLOW CHARTS

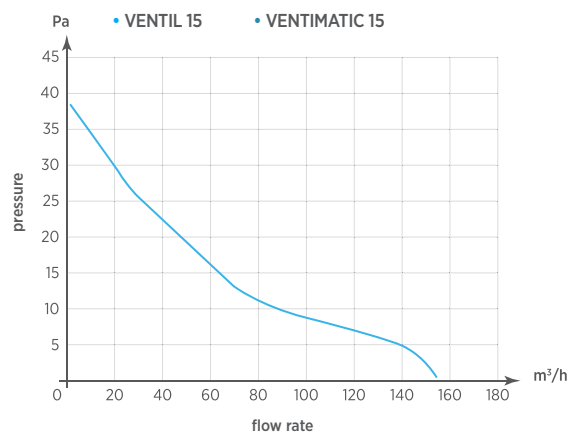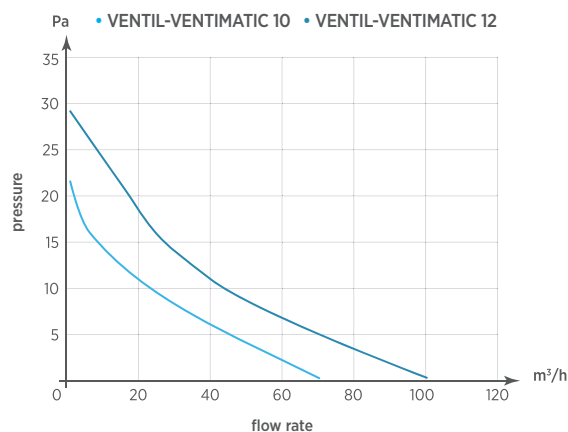

ACCESSORIES:
SEE PAGE 56

