

Model	A	B	C	D	E
MULTI	180	180	60	20	Ø80-90-100-120



MULTI

AXIAL FAN

- Operation indicator light
- "Snap" assembly grid
- Two fixing screws and click assembly of the grille for an easy installation
- Suitable for ducts Ø80-90-100-120 thanks to the four interchangeable back conveyors
- Made of ABS anti-UV
- Ball bearing DC motor, for a long life and a low power consumption
- Versions: Base, Timer
- IPX4 protected
- 45°C working temperature
- Glass kit (optional)

POSITIONING

- Wall mounting, ceiling mounting and glass installation with optional kit

DATA SHEET

Model	Code	Ø Hole (mm)	Voltage (Volt)	Frequency (Hz)	Flow rate max (m³/h)	Flow rate max (mmH₂O)	Press. Max (Pa)	Power (W)	Noise dB(A) _{3m}	Weight (Kg)
MULTI	0057800	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	6
MULTI T	0057801	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	6
MULTI HT	0057802	80-90-100-120	220-240	50-60	175	5,2	51	6,9	33	6

EVIDENCE

ONE UNIQUE PRODUCT FOR SEVERAL DIAMETERS

Ø 80 - 90 - 100 - 120

NEW BRUSHLESS MOTOR

High efficiency
Reduced consumption
Minimal maintenance


ENERGY SAVING

Thanks to the new motor, the consumption is reduced up to 70%

MAXIMAL SILENCE AND COMFORT

Only 33 dB(A)_{3m}

FLOW CHARTS

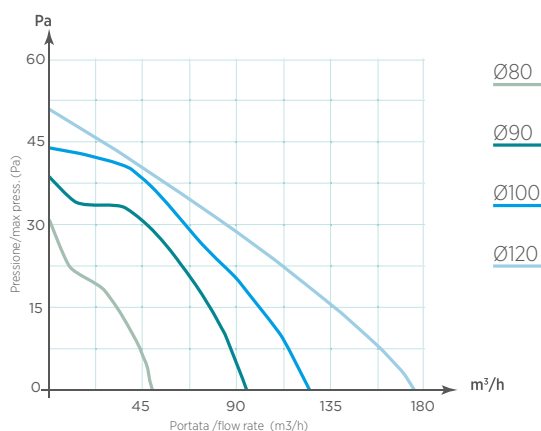

MODEL	Ø80			Ø90			Ø100			Ø120		
	FLOW RATE (m³/h)	POWER (W)	NOISE dB(A) _{3m}	FLOW RATE (m³/h)	POWER (W)	NOISE dB(A) _{3m}	FLOW RATE (m³/h)	POWER (W)	NOISE dB(A) _{3m}	FLOW RATE (m³/h)	POWER (W)	NOISE dB(A) _{3m}
MULTI	50	4,9	33	95	6,4	33	125	6,4	33	175	6,9	33