

Model	Ø A	B	C	D	E	F	G	H	Ø L
Turbocamino	475	415	470	286	184	330	357	415	11

## TURBOCAMINO

### ROOF FAN FOR 200°C

- Centrifugal chimney roof fans for hot fumes (max 200°C)
- To extract hot dusty fumes/air smoke at temperature up to 200°C;
- Suitable for fireplaces, ovens waste or industrial hoods;
- For all chimneys with low natural draw;
- Ball bearing class F insulation motor IP55 protected;
- Aluminium protection cover;
- Self cleaning backward centrifugal zinc plated steel impeller statically and dynamically balanced;

- Safety protection outside grille;
- Provided with electronic speed controller RGE, for industrial use RGM2 available as accessory;
- The opening system allows easy access to the chimney for cleaning;
- In accordance with the essential requirements of 2006/42/EC Directive concerning machines and European Standards UNI EN ISO 13857; UNI EN ISO 12499; CEI EN 60204-1.



### POSITIONING

- Roof mounting


### ENVIRONMENTS APPLICATION

Suitable for all chimneys with insufficient up draught.


### TECHNICAL DATA

Model	Code	Motor	N° poles	Rev. per min. (RPM)	Voltage (Volt)	Frequency (Hz)	Flow rate (m³/h)	Max press. (mm H₂O)	Max press. (Pa)	Power (W)	Nom. curr. (A) 230 V	IP Motor protection	Noisiness dB(A) <sub>2m</sub>	Weight (Kg)
TURBOCAMINO	0055400	Single phase	4	1400	230	50-60	1200	19,5	191	110	0,6	IP55	52,5	15

### FLOW CHARTS

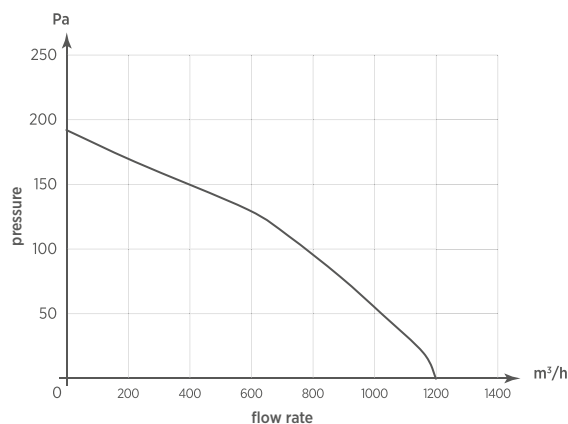

### FURTHER INFORMATION



Compass opening for easy access to the chimney.

### ACCESSORIES:

SEE PAGE 85



Controllers