

Model	A×A	B×B	C	D×D	ØE	H
TXP 6	400	470	40	350	250	520
TXP 7	560	595	40	460	300	650
TXP 8	560	595	40	460	350	650
TXP 10	710	800	40	610	400	700
TXP 12	900	1000	40	800	500	880
TXP 14	900	1000	45	800	550	910
TXP 15	900	1000	45	800	600	940
TXP 18	900	1000	45	800	600	960



## TXP 400°C 2h

### SMOKE EXHAUST FANS FOR FIRE AND CAR GARAGES

Centrifugal roof fans to extract air 400°C 2h with horizontal outlet.

- Centrifugal roof fans to extract air or fumes directly outside or through ducts;
- Medium-high flow rates to overcome pressure losses due to duct resistance;
- Suitable to be installed where is required to extract air or fumes in case of fire such as: industries, sports facilities, supermarket and shopping centres, cinemas, offices;
- Ball bearing class F insulation motor IP55 protected;

- Max temperature of extracted air in continuous operation: 60°C;
- Max temperature of extracted air in case of fire: 400°C for 2 hours;
- Easy installation;
- Zinc plated steel frame, protection cover in ABS material;
- Safety protection outside grille;
- Self cleaning backward centrifugal impeller;
- In accordance with European Standard: EN 12101-3.

### POSITIONING

- Roof mounting









### ENVIRONMENTS APPLICATION

Suitable for evacuation systems in case of fire in:

- Shopping centers
- underground car parkings
- Hospitals
- Schools
- theatres
- museums
- buildings and skyscrapers

### TECHNICAL DATA

Model	Code	Motor	N° poles	Rev. per min. (RPM)	Voltage (Volt)	Frequency (Hz)	Flow rate (m³/h)	Max press. (mm H₂O)	Max press. (Pa)	Power (W)	Nom. curr. (A) 230 V   400 V	IP Motor protection	Noisiness dB(A) <sub>2m</sub>	Weight (Kg)
TXP 6M 4P 400 2H	0074240	single phase	4	1400	230	50/60	1800	30	294	180	1,05 -	IP55	66	20
TXP 7M 4P 400 2H	0074340	single phase	4	1400	230	50/60	3100	40	392	250	1,4 -	IP55	69	28
TXP 8M 4P 400 2H	0074440	single phase	4	1400	230	50/60	4200	45	441	370	1,9 -	IP55	70	34
TXP 10M 4P 400 2H	0074540	single phase	4	1400	230	50/60	5700	56	549	750	3,4 -	IP55	75	45
TXP 6T 4P 400 2H	0074740	three phase	4	1400	230/400	50/60	1800	30	294	180	1,05 0,6	IP55	66	20
TXP 7T 4P 400 2H	0074840	three phase	4	1400	230/400	50/60	3100	40	392	250	1,42 0,82	IP55	69	28
TXP 8T 4P 400 2H	0074940	three phase	4	1400	230/400	50/60	4200	45	441	370	1,9 1,1	IP55	70	34
TXP 10T 4P 400 2H	0075040	three phase	4	1400	230/400	50/60	5700	56	549	750	3,4 1,8	IP55	75	45
TXP 12T 6P 400 2H	0075140	three phase	6	900	230/400	50/60	7100	39	382	750	3,81 2,2	IP55	71	63
TXP 14T 6P 400 2H	0075240	three phase	6	900	230/400	50/60	10800	48	471	1100	5,37 3,1	IP55	75	85
TXP 15T 6P 400 2H	0075440	three phase	6	900	230/400	50/60	14200	57	559	2200	9,35 5,4	IP55	80	105
TXP 18T 6P 400 2H	0075540	three phase	6	900	230/400	50/60	18800	65	637	3000	11,95 6,9	IP55	84	120

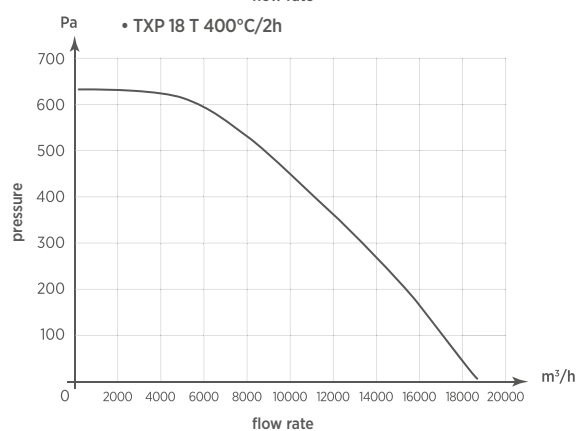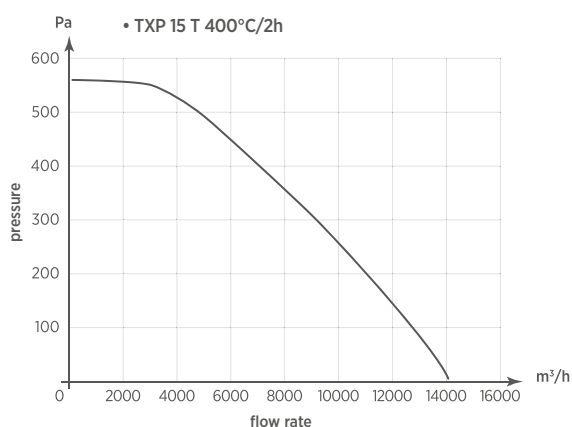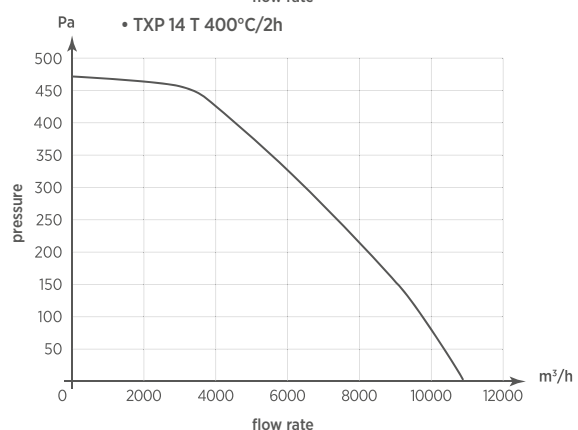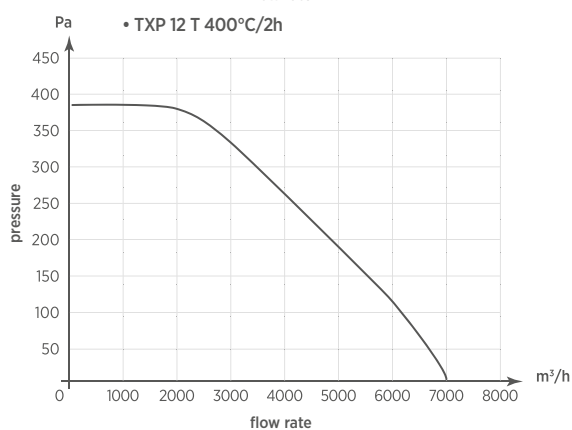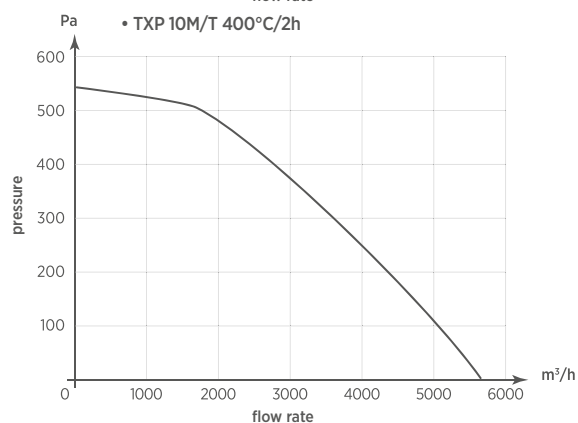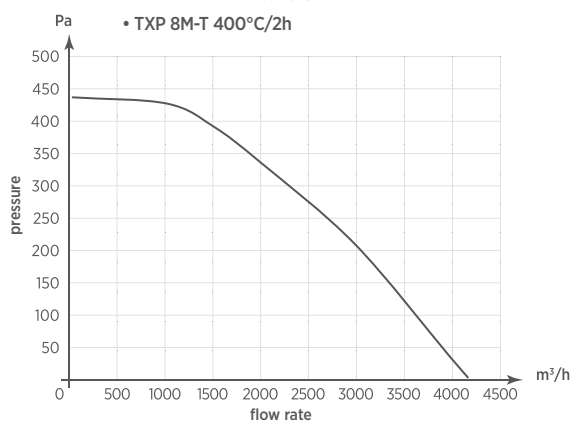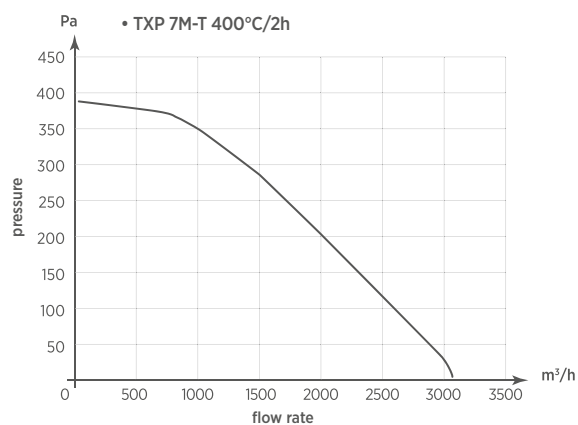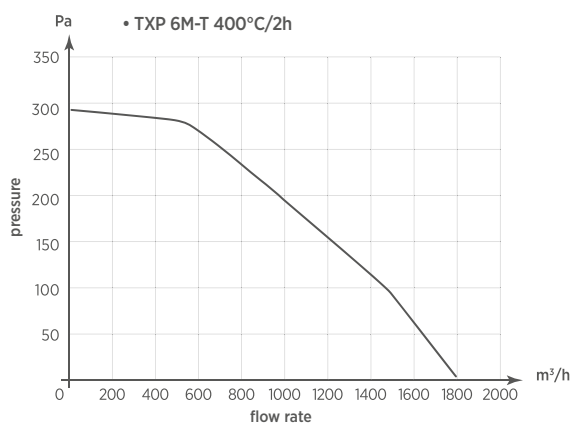

**ACCESSORIES:**  
SEE PAGE 85

Frame  
base